

TOPFIELD

TF 6400 IR

User Guide

Digital Satellite Receiver

IRDETO



DVB
Digital Video
Broadcasting

Contents

1	Introduction	1
1.1	Features	1
1.2	Controlling the digital receiver	2
1.2.1	The front panel	3
1.2.2	The remote control	4
2	Setup	6
2.1	Unpacking	6
2.2	Safety precautions	6
2.3	Rear panel connections	8
2.4	Connecting up your digital receiver	9
2.4.1	Connecting the antenna	9
2.4.2	Connecting to your television	10
2.4.3	Connecting to your video cassette recorder	12
2.5	Switching on for the first time	12
2.5.1	Inserting batteries in the remote control	12
2.5.2	Powering on and checking picture	13

3	Preference Settings	14
3.1	Language settings	14
3.2	Video and audio settings	16
3.2.1	Television standard	16
3.2.2	Colour model	17
3.2.3	Video cassette recorder	17
3.2.4	Television aspect ratio	17
3.2.5	Sound mode	18
3.2.6	Radio frequency output	18
3.3	Local time setting	19
3.4	Parental control	21
3.5	Adjusting the on-screen display	22
4	Service Search	24
4.1	Searching broadcasting services	24
4.1.1	Configuring LNB settings	24
4.1.2	Configuring DiSEqC 1.2 settings	26
4.1.3	Configuring USALS settings	28
4.1.4	Searching services	29
4.2	Resetting to factory settings	32
5	Daily Usage	33
5.1	Volume control	33
5.2	Watching television	33
5.2.1	The services list	33
5.2.2	The favourite services list	36
5.2.3	Viewing programme information	37
5.2.4	Selecting audio tracks	38
5.2.5	Selecting subtitle tracks	38
5.2.6	Viewing teletext	38

5.3	Viewing electronic programme guide	39
5.4	Watching multifeed programme	40
5.5	Making timer events	40
6	Listing Services	43
6.1	Editing the services list	43
6.2	Editing the favourite list	45
6.3	How to use on-screen keyboard	47
6.4	Transferring receiver data	47
7	Firmware Update	49
7.1	Checking the firmware information	49
7.2	From your computer via RS-232 port	51
7.3	From another digital receiver via RS-232 port	52
	Index	53

Chapter 1

Introduction

The TF 6400 IR digital receiver is fully compliant with the international Digital Video Broadcasting (DVB) standard, and can receive digital broadcasts. For its operation you need an antenna, which must be installed appropriately.

NOTE

In general we equate a channel with a frequency. Unlike analogue broadcasts, however, digital broadcasts are not all assigned to their own frequencies; instead, multiple television broadcasts are transmitted through a single frequency. The frequency in digital broadcasting is usually called transponder. To reduce confusion in this manual, the word **service** is preferably used than **channel** as a term to indicate one television or radio broadcast.

1.1 Features

The TF 6400 IR digital receiver has the following features:

- Supports DiSEqC 1.0, DiSEqC 1.1, DiSEqC 1.2 and USALS.

- Can store up to 5000 television and radio services.
- You can edit the services list.
- You can create favourite lists of your favourite services.
- You can view information about the current television or radio programme.
- Has an electronic programme guide that provides an overview of scheduled programmes.
- You can update the firmware of the digital receiver to the latest version, provided by the manufacturer.

1.2 Controlling the digital receiver


The digital receiver can be operated with the remote control and the buttons on the front panel.

NOTE


When the digital receiver is off but plugged into a wall outlet, we say that it is in standby mode; on the other hand, when it is on, it is in operation mode. Even when you are not using the digital receiver, you should keep it plugged into a wall outlet to be in standby mode so that it can run timer events at any time.

1.2.1 The front panel

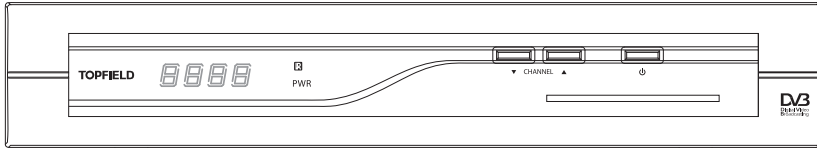

The front panel of the digital receiver has buttons to control the digital receiver, and specific lamps and a display to indicate its status. The following indicates what they mean.




Front display displays the current time in standby mode, and displays the current service in operation mode.

 lamp lights up whenever you press a button on the remote control.


PWR lamp lights up while the digital receiver is in standby mode.

CHANNEL ,  buttons switch to previous or next service. They are also used to navigate in menus and interactive screens.

 button switches the digital receiver between standby mode and operation mode.









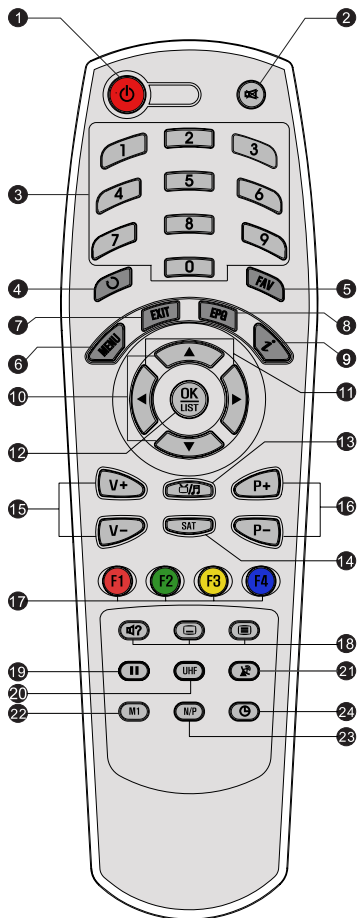







You have to insert your subscription card into the front slot to watch pay services.

1.2.2 The remote control



- ① button switches the digital receiver between standby mode and operation mode.
- ② mutes the sound. Press again to switch it back on.
- ③ Numeric buttons are used to enter a service number for service change or to specify values for menu options.
- ④ switches between the current service and the previously viewed one.
- ⑤ displays the favourite lists.
- ⑥ displays the main menu. It is also used to return to the previous menu from a submenu.
- ⑦ is used to exit the current screen.
- ⑧ displays the electronic programme guide.
- ⑨ displays the service information box. It is also used to display more information about a programme.
- ⑩ switch to previous or next service. They are also used to navigate in menus and interactive screens.

⑪ buttons decrease or increase the volume. They are also used to change values for menu options.

- ⑫  displays the services list. See § 5.2.1 for more details. It is also used to select a menu item.
- ⑬  switches between television services and radio services.
- ⑭  displays the satellite list.
- ⑮ ,  buttons decrease or increase the volume. They are also used to change values for menu options.
- ⑯ ,  buttons switch to previous or next service. They are also used to navigate in menus and interactive screens.
- ⑰ These buttons have different functions per menu. They will be guided by on-screen help.
- ⑱  button is used to select an audio track and sound mode, or a video track of multifeed programme.  button is used to select a subtitle track.  button displays teletext.
- ⑲  pauses live television.
- ⑳  displays the radio frequency setting menu. See § 3.2.6 for more details.
- ㉑  switches the output of the TV SCART socket between the digital receiver and the device connected to the VCR SCART socket. See § 3.2.3 for more details.
- ㉒  is not used in this model.
- ㉓  switches television standard between PAL and NTSC. However, this button may not be used in some models. See § 3.2.1 for more details.
- ㉔  is used to set a sleep timer.

Chapter 2

Setup

2.1 Unpacking

Before going any further, check that you have received the following items with your digital receiver.

- Remote control unit
- Two batteries for the remote control (AAA 1.5 V)
- A copy of this user guide

NOTE

Accessories may vary according to your local area.

2.2 Safety precautions

Please read carefully the following safety precautions.

- The mains power must be 90 to 250 volt. Check it before connecting the digital receiver to the wall outlet. For the power consumption of the digital receiver, refer to Table [2.1](#).

- The wall outlet should be near the equipment. Do not run an extension lead to the unit.
- Do not expose the digital receiver to any moisture. The digital receiver is designed for use indoors only. Use dry cloth when cleaning the digital receiver.
- Place the digital receiver on a firm and level surface.
- Do not place the digital receiver close to heat emitting units or in direct sunlight, as this will impair cooling. Do not lay any objects such as magazines on the digital receiver. When placed in a cabinet, make sure there is a minimum space of 10 centimetres around it. For the physical specification of the digital receiver, refer to [Table 2.2](#).
- Protect the power cord from being walked on or pinched. If the wires are exposed or the cord is damaged, do not use the digital receiver and get the cord replaced.
- Never open the digital receiver casing under any circumstances. The warranty will be void.
- Refer all servicing to a qualified service technician.

Table 2.1: Power specifications


Input voltage	90 to 250 V AC, 50/60 Hz
Power consumption	24 W at maximum in operation 9 W in standby

Table 2.2: Physical specifications

Size	260 × 46 × 190 mm
Weight	1.2 kg
Operating temperature	0 to 45 °C
Storage relative humidity	5 to 95 %

2.3 Rear panel connections

The TF 6400 IR has some connections on the back panel.

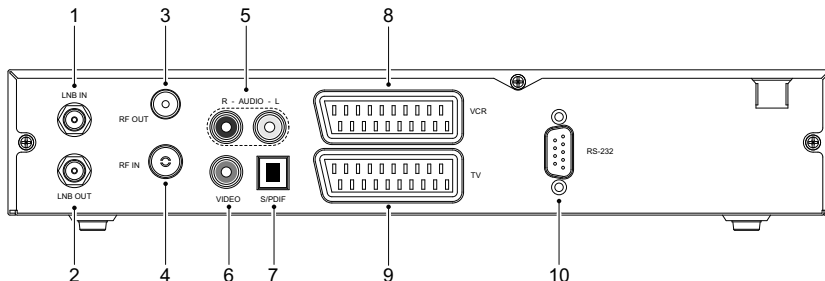

Check what connections your television set has in comparison with the digital receiver.

- ① LNB IN Satellite broadcasting signal input socket.
- ② LNB OUT Satellite broadcasting signal output socket through the LNB IN socket for another digital receiver.
- ③ RF OUT Analogue television output socket.
- ④ RF IN Analogue television input socket.
- ⑤ AUDIO L/R Stereo audio output socket for the television set or the audio system. (white/red)
- ⑥ VIDEO Composite video output socket for the television set. (yellow)
- ⑦ S/PDIF Dolby digital output socket for the audio system.
- ⑧ VCR Audio and video input/output socket for the video cassette recorder or suchlike.
- ⑨ TV Audio and video output socket for the television set.

- ⑩ RS-232 Serial port for firmware update and data transfer.


Table 2.3: Connectors specifications

VIDEO	Composite video (CVBS) output
AUDIO	Left & right audio output
TV	CVBS/S-Video/RGB/YUV video output Left & right audio output
VCR	CVBS video output Left & right audio output CVBS video input for bypass Left & right audio input for bypass
S/PDIF	Dolby digital audio output
RS-232	115.2 kbps at maximum

2.4 Connecting up your digital receiver

There are several ways to set up the digital receiver. Set up the digital receiver suitably to your television and other appliances. If you have any problem with your setup or need help, contact your dealer.

2.4.1 Connecting the antenna



Whatever sort of connection you have between the digital receiver and the television, you need to connect the digital receiver to your television antenna so that it can receive digital television services.

Connect the antenna cable to the LNB IN connector.

If you have another digital receiver, link it from the LNB OUT connector.


2.4.2 Connecting to your television

Between all the following connectors of the digital receiver, we recommend you to use the first connector to get best picture quality. If your television does not have the matching connector, then use the next connector in the following order for better picture quality.

1. SCART connector (TV)
2. Composite connector (VIDEO)
3. RF connector (RF OUT)

You should configure audio and video settings after connecting up the digital receiver. See § 3.2 for detailed description.

To use the SCART connector




For best results with a standard television set, you should use a SCART cable, plugging one end into the TV socket on the digital receiver and the other end into a free SCART socket on your television.


Some televisions have inputs via Component connector or S-Video connector rather than SCART.

If you have such a television, use an appropriate conversion cable to link the TV socket on the digital receiver to the matching socket on your television.


If you connect with a standard SCART cable, you do not have to make audio connections because the SCART connector can output stereo audio. But if you use a conversion cable, such as SCART-to-Component, you have to make audio connections.

To use the composite video connector

You will need to obtain a composite video cable (RCA cable) to use the composite video connector. Plug one end of the cable into the VIDEO (yellow) socket on the digital receiver, and the other end into the matching socket on your television.

To connect the audio connectors


You will need to obtain an audio cable (RCA cable) to connect the audio connectors. Plug one end of the cable into the AUDIO L (white) and AUDIO R (red) sockets on the digital receiver, and the other end into the matching sockets on your television or audio system.



To enjoy Dolby digital audio, your television or audio system must be able to decode Dolby digital audio, and you will need to obtain a S/PDIF cable. Plug one end of the cable into the S/PDIF socket on the digital receiver, and the other end into the matching socket on your audio system.

To use the RF connector

If your television does not have any video and audio input, you will need to use the radio frequency output from the digital receiver.




In this case, you will need to connect a cable from the RF OUT socket to the antenna connector on your television. To ensure your television can also pick up existing analogue channels as well, you will need to connect a cable from your television antenna to the RF IN connector.

Tune your television set to channel 36 (or rarely 43) so that you can see the output from the digital receiver.

2.4.3 Connecting to your video cassette recorder

The digital receiver can also output video to another appliance such as a video cassette recorder or video receiver through an auxiliary SCART connector.



You will need to obtain a SCART cable to use the auxiliary SCART connector. Plug one end of the cable into the VCR socket on the digital receiver, and the other end into the matching socket on your video cassette recorder or suchlike.

2.5 Switching on for the first time

Now that you have your digital receiver connected, you should plug it in to a mains socket. Ensure that your television set is turned on, so that you will be able to see the display from the digital receiver.

2.5.1 Inserting batteries in the remote control


To insert the batteries, open the battery compartment by removing the lid, and then insert the batteries observing the polarity, which is marked on the base of the battery compartment.

If the digital receiver no longer reacts properly to remote control commands, the batteries may be flat. Be sure to remove used batteries. The manufacturer accepts no liability for the damage resulting from leaking batteries.

NOTE

Batteries, including those which contain no heavy metals, may not be disposed of with household waste. Please dispose of used batteries in an environmentally sound manner. Find out about the legal regulations which apply in your area.

2.5.2 Powering on and checking picture


Now, press the  button in top left corner on the remote control.

If the picture is good, you can skip to § [4.1.4](#) to search for the available television and radio services. Otherwise, you may need to temporarily connect the composite video connector (VIDEO) to your television set so that you can see the on-screen menus in order to configure the video settings.

Chapter 3

Preference Settings

3.1 Language settings

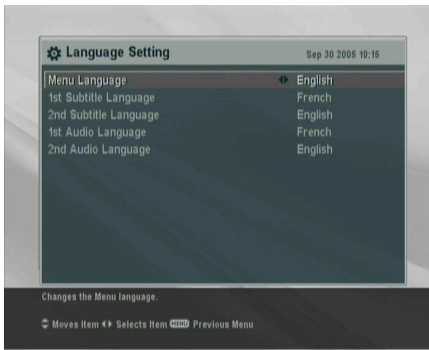

You can select the language in which the menu would be displayed. In addition to that, you can select which language of audio track and of subtitle track should be output.


Select the System Setting > Language Setting menu. You should see a screen like the left figure.

Menu language

The digital receiver supports many menu languages: Dutch, English, German, French, Italian, Russian, Turkish and so forth. Set the Menu Language option to your desired language. Once you select a language, the menu will be immediately displayed in the selected language.


Subtitle language

Set the 1st Subtitle Language option and the 2nd Subtitle Language option to your desired languages. When you watch a programme, if the programme has a subtitle track of the language that is designated for the 1st Subtitle Language, it will be displayed. If the first language is not available but the second language is available, the subtitle of the second language will be displayed. If there is not any available language, no subtitle will be displayed.


Apart from this setting, you can select a subtitle track with the  button. See § 5.2.5 for detailed description.

Audio language

Set the 1st Audio Language option and the 2nd Audio Language option to your desired languages. When you watch a programme, if the programme has an audio track of the language that is designated for the 1st Audio Language, it will be output. If the first language is not available but the second language is available, the audio of the second language will be output.

Apart from this setting, you can select an audio track with the  button. See § 5.2.4 for detailed description.

3.2 Video and audio settings

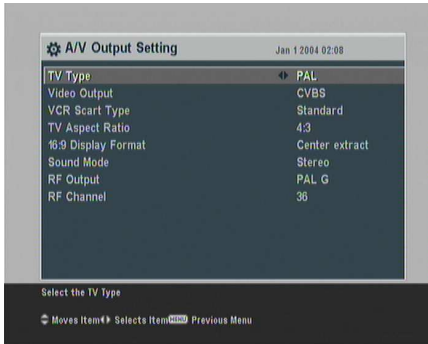

You have to configure the video and audio settings appropriately to your television set and other appliances.

Select the **System Setting** > **A/V Output Setting** menu. You should see a screen like the left figure.

3.2.1 Television standard

The digital receiver supports two television standards. One is PAL standard, and the other is NTSC standard. PAL was adopted in European countries while NTSC is adopted in USA, Canada, Mexico and so forth. Refer to Table 3.1 for television standard of your local area.

If you have a PAL television, you have to set the TV Type option to PAL. In that case, if you switch to a service of the NTSC standard, the digital receiver will presents the pictures converting into the PAL standard. However, it is inevitable to lose a little picture quality. Likewise, the contrary case brings about the same result.


The best thing is to watch PAL services with a PAL television and to watch NTSC services with a NTSC television. However, a multi television set is able to process both of them. So if you have a multi television set, you had better set the TV Type option to Multi. Then the digital receiver will present pictures without standard conversion.

3.2.2 Colour model

Through the TV SCART connector, the digital receiver is able to output video in various colour models. If you have the digital receiver linked to your television via this connector, you should set the Video Output option to your desired colour model. If you have connected via the RCA connector labeled VIDEO on the back panel, you do not have to set this option because the digital receiver outputs CVBS video through the RCA connector independent of the SCART connector.

It is known in general that the RGB colour model provides the best video quality with little difference from the YUV colour model but the CVBS colour model does the least. So RGB would be most desirable for this option.

3.2.3 Video cassette recorder

You can have the digital receiver linked to your video cassette recorder or such an appliance via the VCR SCART connector. In that case, the digital receiver will operate differently depending on the setting of the VCR Scart Type option. If the option is set to Standard, the digital receiver will pass the video from the video cassette recorder to your television when it starts playback. But if the option is set to External A/V, the digital receiver will not pass the video automatically. To pass it, you have to press the  button.

3.2.4 Television aspect ratio

If you have a wide-screen television, set the TV Aspect Ratio option to 16:9.


Otherwise, if you have a normal-screen television, set the TV Aspect Ratio option to 4:3.



You cannot fully enjoy wide-screen programmes with your normal-screen television as the above figures show. The left figure shows a normal picture displayed in the normal screen. To watch wide-screen programmes in the shape like the centre figure, set the 16:9 Display Format option to Letter Box. Wide-screen pictures then will be reduced to fit to the width of the normal screen. Otherwise, to watch them in the shape like the right figure, set it to Center extract. Wide-screen pictures then will be cut out on the left and right sides equally to fit to the width of the normal screen.

3.2.5 Sound mode

Basically, there are two audio sources as you can find two audio sockets on the back panel of the digital receiver. You can enjoy only one source or both of them in either stereo or mono. Set the Sound Mode option as you desire.

Apart from this setting, you can change the sound mode with the  button. See § 5.2.4 for detailed description.

3.2.6 Radio frequency output

If you have connected your television to the RF OUT socket, you should configure the radio frequency output. The digital receiver can make analogue television from digital television and output it via the RF OUT socket.

Set the RF Output option to the television standard that your country supports referring to Table 3.1.


Table 3.1: Television standards by country

Signal type	Country
PAL G	Australia, Austria, Cyprus, Czech Republic, Egypt, Estonia, Finland, Germany, Greece, Iceland, Iran, Israel, Italy, Kuwait, Latvia, Libya, Lithuania, Luxembourg, Netherlands, New Zealand, Norway, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland, Syria, Yugoslavia
PAL I	Hong Kong, Macao, Republic of Ireland, South Africa, United Kingdom
PAL K	Czech Republic, Hungary, Poland
NTSC M	Bahamas, Belgium, Bolivia, Chile, Ecuador, Fiji, Guam, Jamaica, Mexico, Panama, Peru, United States, Venezuela

Set the RF Channel option to a channel number as you desire. You then have to retune your television set to the new channel number.

3.3 Local time setting

You should set your local time for timer events. If you do not set the local time right, the programme time table provided by the programme guide may be distrustful. For the programme guide, refer to § 5.3.

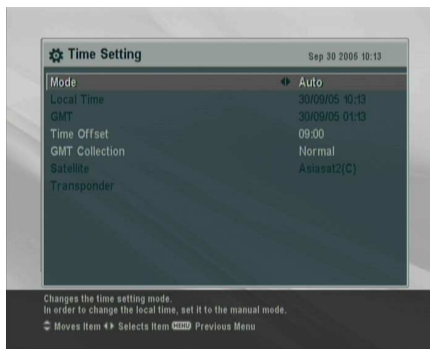

Select the System Setting > Time Setting menu. You should see a screen like the left figure.

You can set the clock manually or use the time signal, Greenwich Mean Time (GMT), carried as part of the digital television broadcast.

To use Greenwich Mean Time, take the following steps:

1. Set the Mode option to Auto; then the Time Offset option becomes enabled.

Table 3.2: Time offset table

Time offset	City
GMT – 12:00	Eniwetok, Kwajalein
GMT – 11:00	Midway Island, Samoa
GMT – 10:00	Hawaii
GMT – 09:00	Alaska
GMT – 08:00	Pacific Time US, Canada
GMT – 07:00	Mountain Time US, Canada
GMT – 06:00	Central Time US, Canada, Mexico City
GMT – 05:00	Eastern Time US, Canada, Bogota, Lima
GMT – 04:00	Atlantic Time Canada, La Paz
GMT – 03:30	Newfoundland
GMT – 03:00	Brazil, Georgetown, Buenos Aries
GMT – 02:00	Mid-Atlantic
GMT – 01:00	Azores, Cape Verde Islands
GMT	London, Lisbon, Casablanca
GMT + 1:00	Paris, Brussels, Copenhagen, Madrid
GMT + 2:00	South Africa, Kaliningrad
GMT + 3:00	Baghdad, Riyadh, Moscow, St. Petersburg
GMT + 3:30	Tehran
GMT + 4:00	Abu Dhabi, Muscat, Baku, Tbilisi
GMT + 4:30	Kabul
GMT + 5:00	Ekaterinburg, Islamabad, Karachi, Tashkent
GMT + 5:30	Bombay, Calcutta, Madras, New Delhi
GMT + 6:00	Almaty, Dhaka, Colombo
GMT + 7:00	Bangkok, Hanoi, Jakarta
GMT + 8:00	Beijing, Perth, Singapore, Hong Kong
GMT + 9:00	Tokyo, Seoul, Osaka, Sapporo, Yakutsk
GMT + 9:30	Adelaide, Darwin
GMT + 10:00	Eastern Australia, Guam, Vladivostok
GMT + 11:00	Magadan, Solomon Islands, New Caledonia
GMT + 12:00	Fiji, Auckland, Wellington, Kamchatka

2. Set the Time Offset option to the time difference between your time zone and GMT referring to Table 3.2.
3. To get Greenwich mean time, set the GMT Collection option to one among the following:
 - Normal from all transponders
 - CAS TP from transponders of pay services
 - User Select from transponders specified by you
 If you set it to User Select, then the Satellite option and

the Transponder option become enabled. Select your desired satellite and transponders at those options. With the above settings, the digital receiver will scan all transponders specified one by one until to get the Greenwich Mean Time.


4. Make sure that your local time is correctly displayed on the Local Time option.

To set the local time yourself, set the Mode option to Manual and enter your local time to the Local Time option with the numeric buttons. The time format is *day/month/year 24-hour:minute*.

3.4 Parental control

In general, television programmes are classified according to the level of violence, nudity and language of their content. When you are watching a programme, you can check its programme classification on the information box. For the information box, see § 5.2.3.

You can prevent your children from watching specific programmes by specifying a programme classification.

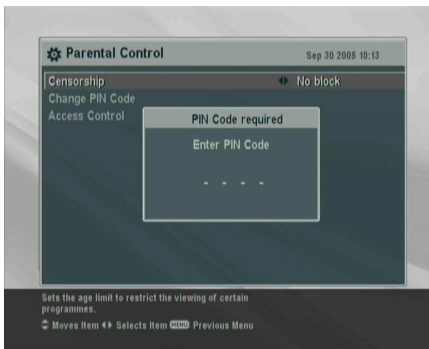

Select the System Setting > Parental Control menu. You should see a screen like the left figure, and you will be asked your Personal Identification Number (PIN). The number is initially set to '0000'.

If you wish to block 15 or above rated programmes, set the Censorship option to 15 (age). Setting it to No block blocks no

programme; on the other hand, setting it to **Total block** blocks every programme.

NOTE


If a programme does not have any programme classification information, your censorship setting will not take effect.

If anyone is trying to watch a programme that is of or above the censorship setting, the person has to enter the personal identification number to override.

To change the number, select the **Change PIN Code** menu; then an input box appears. You have to enter a desired number twice for confirmation.

You can also restrict uses of some menus. Selecting the **Access Control** menu displays a list of menus that you can lock. If the **Time Setting** item is set to **Locked**, you have to enter the personal identification number when accessing the **Time Setting** menu. If you enter a wrong number, you cannot use the menu. To release a shut item, set it to **Unlocked**.

3.5 Adjusting the on-screen display

You can adjust the transparency level of the on-screen display. Select the **System Setting** menu and set the **OSD Transparency** option as you desire. Its available range is from 0 to 50 percent. You can adjust the display time of the information box. For the information box, see § 5.2.3. To adjust its display time, select the **System Setting** menu and set the **Info Box Display Time** option as you desire. Its available range is from 1 to 30 seconds. If you set this option to **No Info Box**, the information box will not be displayed when you switch services. However, pressing the  button will display the information box. If you set this option to **Never Hide**, the information box will always be displayed.

In addition, you can raise or lower the position of the information box. Select the **System Setting** menu and set the **Info Box**

Position option as you desire. Its available range is from -10 to $+3$ lines. The more high you set the option, the more low the information box will be positioned.

Chapter 4

Service Search

After connecting up the digital receiver, you will need to perform a service search.

4.1 Searching broadcasting services

This digital receiver can be operated with both fixed antenna and motorized antenna. You have to configure antenna settings according to your antenna system in the following order:

1. Configure LNB settings. (Refer to § 4.1.1.)
2. Set the position of your desired satellites if you have a motorized antenna. You can control the antenna in DiSEqC 1.2 mode or USALS mode. Refer DiSEqC 1.2 to § 4.1.2, and refer USALS to § 4.1.3.
3. Perform service search.

4.1.1 Configuring LNB settings


There are in large two frequency bands for satellite broadcasts. One is C band which ranges approximately from 4 to 6 GHz.

The other is K_u band which ranges approximately from 12 to 18 GHz.



The LNB (Low Noise Block converter) is used to take a wide band of relatively high frequencies, amplify and convert them to similar signals that is carried at a much lower frequency, which is called Intermediate Frequency (IF).

High frequencies from satellites are converted into 950 to 2150 MHz by a LNB.

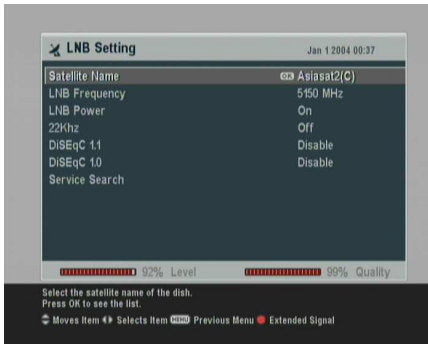

Select the Installation > LNB Setting menu to configure the LNB settings. You should see a screen like the left figure.

Pressing the OK button on the Satellite Name option displays the satellite list in alphabetic order. Select the satellite toward which your antenna is set to face.

The digital receiver has a database about broadcasting satellites and their transponders, containing the following information: satellite position, frequency range, symbol rate, polarization and LNB frequency corresponding to the frequency range. So you might not have to specify the LNB Frequency option. However, if you have selected the Other entry at the Satellite Name option to specify a satellite that is not in the satellite list, you


might have to fill in the correct LNB frequency. The absolute difference between a broadcasting frequency and its LNB frequency must be within 950 to 2150 MHz. For example, if the frequency band of your desired satellite ranges from 3660 to 4118 MHz, you have to set the LNB Frequency option to 5150 MHz.

The LNB has to be supplied with electric power to operate. Set the LNB Power option to On if it does not have any other power supply.

You had better ignore the 22 kHz option.

The digital receiver is designed to be compatible with DiSEqC (Digital Satellite Equipment Control) switches. It is possible to connect several antennas to one digital receiver by DiSEqC switches. A DiSEqC 1.0 switch allows switching between up to four satellite sources and a DiSEqC 1.1 switch allows switching between up to 16 satellite sources.

Set the DiSEqC 1.0 option and the DiSEqC 1.1 option according to your antenna configuration.

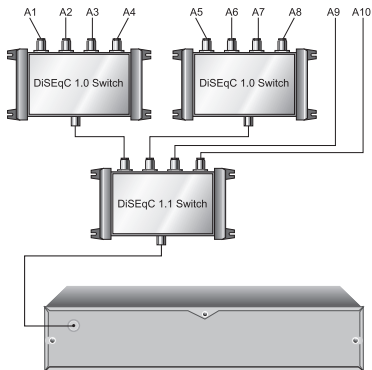

For example, to select the antenna connected to the A5 input in the left figure, set the DiSEqC 1.1 option to 2 of 4 and the DiSEqC 1.0 option to 1 of 4. If you have a mini DiSEqC 1.0 switch which has only two inputs, you should set the DiSEqC 1.0 option to Mini A instead of 1 of 4.

4.1.2 Configuring DiSEqC 1.2 settings

Your motorized antenna will turn toward your desired satellites horizontally by DiSEqC 1.2.



When you switch to an service, if the service is provided by a satellite other than current one, it will take longer time than usual because the antenna has to turn to its position.



To use the DiSEqC 1.2 protocol, select the Installation > Motorized DiSEqC 1.2 menu. You should see a screen like the left figure.

At first you have to set the Motorized DiSEqC 1.2 option to Enable.

To get the correct position of your desired satellite, perform the following steps:

1. Choose your desired satellite at the Satellite Name option.
2. Set the DiSEqC Command Mode option to User.
3. Set the Motor Control option to Goto. Then the antenna will turn toward your selected satellite by the position data that the digital receiver has.
4. If the receiving quality, which is displayed at the bottom right of the screen, is not good, tune the antenna finely with the Movement option. If you set it to 2(E), the antenna will move to the east by two degrees. At this time you had better check the receiving quality of every transponder and choose the best one at the Transponder (or Frequency) option. It will be helpful to your fine tuning.

5. Finally set the Motor Control option to Store to save the tuned position when the receiving quality is best

There are more motor control options for installers, but this guide does not describe them. If you are an installer, refer them to the manual about the *STAB* rotor.

4.1.3 Configuring USALS settings

USALS (Universal Satellite Automatic Location System), also known as DiSEqC 1.3, calculates the positions of all available satellites from your location. Compared to DiSEqC 1.2, it is no longer required to manually search and store every satellite position. Just pointing to a known satellite position is enough. This position will act as a central point. The USALS will then calculate positions of visible satellites.



To use the USALS protocol, select the Installation > USALS Setting menu. You should see a screen like the left figure.

At first you have to set the Motorized DiSEqC 1.3 option to Enable.

To get every satellite position calculated, perform the following steps:

1. Choose your desired satellite at the Satellite Name option.
2. Enter your location to the My Longitude option and the My Latitude option with the ◀, ▶ and numeric buttons.
3. Enter the position of your selected satellite to the Satellite Angle option if it is not correct.

4. Select the **Goto** the position option; then the antenna will turn toward your selected satellite as calculating its position.
5. If the receiving quality, which is displayed at the bottom right of the screen, is not good, then tune the antenna finely with the **Move** option. The changed position is automatically saved. At this time you had better check the receiving quality of every transponder and choose the best one at the **Transponder** (or **Frequency**) option. It will be helpful to your fine tuning.

4.1.4 Searching services



To perform service search, select the **Installation > Service Search** menu. You should see a screen like the left figure.

There are four service search methods:

- Searching every service of a satellite.
- Searching every service of a transponder.
- Searching one service of a transponder.
- Searching every service of a SMATV (Satellite Master Antenna Television) system.

Searching every service of a satellite

To search every service of a satellite, perform the following steps:

1. Choose your desired satellite at the Satellite Name option.
2. Set the Search Mode option to Auto.
3. If you set the Network Search option to On, the digital receiver will check up the up-to-date channel information as searching services, but it takes rather longer time.

Searching every service of a transponder

To search every service of a transponder, perform the following steps:

1. Choose your desired satellite at the Satellite Name option.
2. Set the Search Mode option to Manual.
3. Choose your desired transponder at the Frequency option or enter it with the numeric buttons.
4. Enter the symbol rate of your desired transponder to the Symbol Rate option with the numeric buttons.
5. Set the Polarization option to the polarization of your desired transponder.
6. If you set the Network Search option to On, the digital receiver will check up the up-to-date channel information as searching services, but it takes rather longer time.

NOTE

You may get transponder information from a satellite magazine or web site such as <http://www.satcodx.com> or <http://www.lyngsat.com>.

Searching one service of a transponder

To search one service of a transponder, perform the following steps:

1. Choose your desired satellite at the Satellite Name option.
2. Set the Search Mode option to Advanced.
3. Choose your desired transponder at the Frequency option or enter it with the numeric buttons.
4. Enter the symbol rate of your desired transponder to the Symbol Rate option with the numeric buttons.
5. Set the Polarization option to the polarization of your desired transponder.
6. Specify the PIDs of your desired service at the PID option with the numeric buttons. PID (Packet Identifier) is a set of numbers that identifies transport stream packets.

Searching every service of SMATV system

To search every service of a SMATV system, if the digital receiver is connected to it, perform the following steps:

1. Choose your desired satellite at the Satellite Name option.
2. Set the Search Mode option to SMATV.
3. Choose your desired transponder at the Frequency option or enter it with the numeric buttons.
4. Enter the symbol rate of your desired transponder to the Symbol Rate option with the numeric buttons.
5. Set the Polarization option to the polarization of your desired transponder.

You can search pay services as well as free services as follows:

- To search only free services, set the FTA/Scrambled option to FTA only.
- To search only pay services, set it to CAS only.

- To search both free services and pay services, set it to **FTA + CAS**.

To start service search, select the **Start Search** item; then a list box appears, in which found services will be listed. When it has completed, press the **[OK]** button to save found services. To stop at any time or to exit without saving, press the **[EXIT]** button.

4.2 Resetting to factory settings

The digital receiver maintains the following data:


- Satellite list
- Services list
- Favourite list
- Timer list
- Preference settings

You can reset all data of the digital receiver. To do that, select the **Installation > Factory Setting** menu, and then you are asked for confirmation. If you select **Yes**, service entries, favourite entries and timer events will all be deleted, and preference options will be reset to the manufacturer's factory settings.


Chapter 5

Daily Usage

5.1 Volume control

Use the ◀ and ▶ buttons to alter the volume to a comfortable level. You may need to adjust the volume on your television set too. To temporarily switch off the sound, press the  button. Press it again to restore the sound to previous level.

5.2 Watching television

To change services, press the ▲ or ▼ button. Pressing the  button switches to the previously viewed service. In addition, you can switch to your desired service by entering its service number with the numeric buttons. You can also select a service to watch in the services list.

5.2.1 The services list

To view the services list, press the  button.



On the services list, you can see the service information:

- Service number and name
- Transmitting satellite
- Transponder information

A dollar sign (\$) may be marked on some entries, indicating pay service. To watch pay services, you need the subscription card.

To select a desired service, put the highlight bar on its entry with the ▲ or ▼ button and press the (OK) button; then it will be presented.

Pressing the ◀ or ▶ button skips over 10 entries up or down. Entering a service number with the numeric buttons puts the highlight bar on its entry.

You can switch between the television services list and the radio services list by pressing the (M/R) button.

Pressing the (F3) button performs an alphabetic browse. For instance, when the highlight bar is on an entry of which initial is B, pressing the (F3) button puts the highlight bar on the first entry of which initial is C.

To sort the services list by service name, press the (F2) button. Pressing this button once more makes it sorted by service number.

Pressing the (F4) button displays the additional options, with which you can do the following:

- Select your desired satellite at the Satellite option, then only services provided by the selected satellite will be listed.

- By setting the Show Provider option to On, you can view service entries by groups of broadcasters.
- To change the name of the highlighted service, select the **Rename** option; then the on-screen keyboard appears, with which you can enter a new name. See § 6.3 for how to use the on-screen keyboard.
- You can prevent other family members from watching the highlighted service by setting the **Lock** option to **Locked**. You have to enter your personal identification number to watch or unlock it.
- To delete the highlighted service, select the **Delete** option; then you are asked for confirmation. If you select **Yes**, it will be deleted. If you want to restore it as before, you have to perform service search again. See § 4.1.4 for service search.
- To add the highlighted service into a favourite group, select the **Add to Fav** option; then the favourite groups will be displayed. Put the highlight bar on a desired group and press the **OK** button.
- You can additionally sort the services list with the **Sorting** option as follows:
 - Default by service number
 - Alphabetic by service name
 - Satellite by satellite
 - FTA–CAS from free services to pay services
 - CAS–FTA from pay services to free services
 - Provider by broadcaster
 - Fav–NoFav from favourite services to unfavourite services.

Pressing the **SAT** button displays the satellite list. Once you select a desired satellite, only services provided by the selected satellite are listed.

5.2.2 The favourite services list

You can select a service to watch on a favourite list as well as on the services list.



To display the favourite lists, press the **(FAV)** button. You should see a screen like the left figure. As you move the highlight bar up or down on the favourite group list at the left box, favourite services belonging to the highlighted group are listed on the right box.

For how to edit the favourite lists, refer to § 6.2.


To select a favourite service, put the highlight bar on a desired group and press the **▶** button; a highlight bar appears on its favourite services list. Once you select a desired service with the **(OK)** button, it will be presented. Otherwise, to select other group, press the **◀** button.

After you have selected a favourite service, if you then switch to another service using the **▲** or **▼** button, it will be also another favourite service of the selected group. The digital receiver will remind you what group you have selected by displaying its name at the top right of the screen whenever you switch services. If you wish to get out of the current group, select the **All services** group on the favourite group list.

Besides that, you can add or delete a favourite group or service. To add a service you are watching currently into a favourite group, put the highlight bar on a desired group and press the **(F3)** button. To create a new group, press the **(F2)** button; then the on-screen keyboard appears. Enter your desired name and save it. See § 6.3 for how to use the on-screen keyboard. To

delete a group or a service, press the **F4** button; then you get asked for confirmation. If you select **Yes**, it will be deleted.





5.2.3 Viewing programme information

Pressing the  button displays the information box, on which you can see all of the following:




- Service number and name
- Transmitting satellite
- Transponder information
- Signal level and quality
- Programme name
- Programme classification symbol
- Programme summary
- Broadcasting time
- Current time



In addition, you might see the following symbols:

- Subtitle symbol () if subtitle tracks are provided on the current programme.
- Teletext symbol () if teletext pages are provided on the current service.
- Lock symbol () if the current service is locked.
- Dollar symbol (\$) if the current service is a pay service.
- Multifeed symbol () if the current programme is provided as a multifeed programme. To use this feature, refer to § 5.4.



If the electronic programme guide is provided on the current service, you can see the information about the current and next programmes with the **◀** or **▶** button. To adjust the sound volume in this case, hold down the **◀** or **▶** button until the sound bar appears and reaches your desired level.

Pressing the  button once more displays detailed information about the current programme. To hide the information box, press the **[EXIT]** button.



5.2.4 Selecting audio tracks

Some programmes are provided with audio tracks in one or more languages. Pressing the  button displays available audio tracks. Once you select an audio track, it will be sounded. In addition, you can enjoy audio tracks in four sound modes: Stereo, Mono, Left or Right. However, if a multifeed programme is provided at the moment, video tracks will be displayed. In this case, you have to press the  button once more to select an audio track.

5.2.5 Selecting subtitle tracks

Some programmes are provided with subtitle tracks in one or more languages. If the current programme provides subtitle tracks, the subtitle symbol () will be marked on the information box. Pressing the  button displays available subtitle tracks. Once you select a subtitle track, it will be displayed.


5.2.6 Viewing teletext

On some services, such information as weather reports, news or stock quotations is provided by means of teletext. If the current service provides teletext, the teletext symbol () will be displayed on the information box. Press the  button to view teletext pages.

Select a desired page to view by entering its page number with the numeric buttons. You can zoom into a teletext page with the **[F3]** button, and adjust its transparency level with the **[F4]** button. To hide the teletext screen, press the **[EXIT]** button.

5.3 Viewing electronic programme guide

The Electronic Programme Guide shows the current and scheduled programmes that are or will be available on each service with a short summary for each programme.

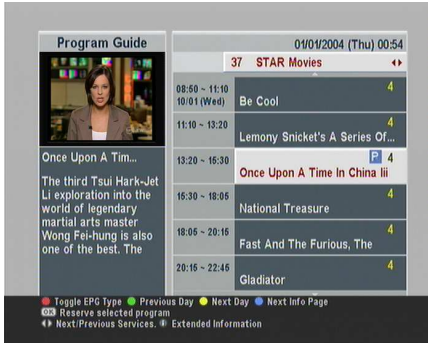

Pressing the **(EPG)** button displays the electronic programme guide, on which you can see the following:

- Scheduled programmes
- programme summary
- Broadcasting date
- Broadcasting time

To see detailed information of a desired programme, put the highlight bar on your choice with the **▲** or **▼** button and press the **⏏** button. To switch to another service, press the **◀** or **▶** button. You can travel over previous days with the **(F2)** button, and can travel over next days with the **(F3)** button.

To see the programme guide for radio broadcasts, press the **(📻)** button. To switch it back, press the **(📺)** button again.

Pressing the **(F1)** button displays the programme guide in the form of a spreadsheet. To switch it back, press the **(F1)** button again.




You can make a timer event on the electronic programme guide as follows:

1. Select a service you want.
2. Press the **(EPG)** button to display its programme guide.
3. Select a programme you want with the **(OK)** button, then **P** is marked up on the entry. At the same time, a timer event with the selected programme will be made in the timer list. Refer the timer list to § 5.5.

4. To remove the marking, press the **OK** button once again.


5.4 Watching multifeed programme

Some broadcasts such as sports channels can provide a variety of perspectives on a programme at a same time. We call it a multifeed programme. You can select and watch a perspective you prefer.

If a multifeed programme is provided on the current service, the multifeed symbol () will be marked on the information box. Press the , then available video tracks will be listed. Once you select one, it will be presented. At this time, you have to press the  button once more to select audio tracks.

5.5 Making timer events

You can make your desired services to be presented at a specific time. Even if the digital receiver is in standby mode, it will switch into operation mode at the specified time. However, if you press any button on the remote control or on the front panel even just one time, the digital receiver will not switch into standby mode.

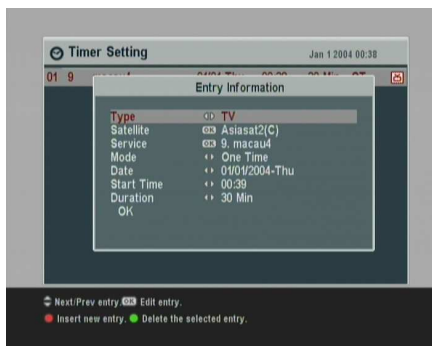

To input a timer recording, select the Timer Setting menu; then the timer list will be displayed.

To add a new timer event, press the **F1** button, and a box like the left figure appears. Take the following steps:

1. If you want a radio programme, set the **Type** option to **Radio**; otherwise, set it to **TV**.
2. Set the **Satellite** option to the satellite which transmits the service you want. Pressing the **[OK]** button on this option displays a satellite list, from which you can select your desired satellite.
3. Set the **Service** option to the service which provides the programme you want. Pressing the **[OK]** button on this option displays a services list, from which you can select your desired service.
4. There are five timer modes:
 - One Time** means literally 'one time'.
 - Every Day** means literally 'every day'.
 - Every Weekend** means 'Saturday and Sunday every week'.
 - Weekly** means 'one day every week'.
 - Every Weekday** means 'from Monday to Friday every week'.

If your favourite programme is broadcasted at weekends and you wish to watch every episode of the programme, set the **Mode** option to **Every Weekend**.
5. Set the **Date** option to a desired date, on which the digital receiver will turn on. The date format is *day/month/year-day of the week*.
Set the **Start Time** option to a desired time, at which the digital receiver will turn on. The time format is *hour:minute*.
6. Set the **Duration** option to a desired time, in which the digital receiver will turn off.
7. To set a timer event with the above settings, select the **OK** option; otherwise, it will not be saved and will not occur.


To delete a timer event, put the highlight bar on the entry you want to remove and press the **F2** button; then you are asked for confirmation. If you select **Yes**, it will be deleted.

Chapter 6

Listing Services

6.1 Editing the services list


You would have got the services list after service search. You can rename, move, lock or delete service entries on the services list.

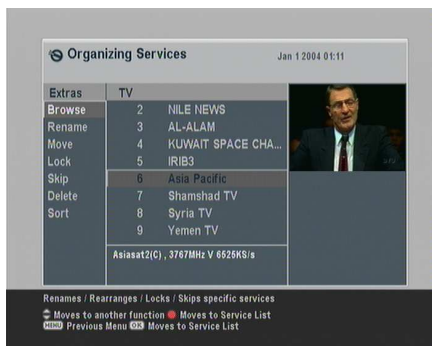

Select the Organizing Svc/Fav > Organizing Services menu. You should see a screen like the left figure.


There are editing options on the left column and service entries on the right column.

Once you put the highlight bar on a desired option on the left column and press the **OK** button, you can select a desired service to edit on the right column. To go over to the other column, press the **F1** button.

To edit the radio services list, press the  button; then radio service entries will be listed on the right column. To switch back to the television services list, press it again.

To change the name of a service, select the **Rename** and select a desired service; then the on-screen keyboard appears. See § 6.3 for how to use the on-screen keyboard.

Unlike analogue broadcasts, each service does not have a proper service number in digital broadcasts. Service numbers are just assigned to services in the order that they were found in service search. So you can reassign a service number by moving a service entry. To move a service entry, select the **Move** option and select a desired service; then the selected service becomes darker. As you move it up or down, it gets renumbered according to the position. Press the **OK** button to fix it.

You can lock some services to prevent your children from watching them. To lock a service, select the **Lock** option and select a desired service; then the selected service gets marked with a lock symbol  on it. If anyone tries to watch a locked service, the person has to enter the personal identification number that is set to the **Change PIN Code** option. See § 3.4 for this option. Pressing the **OK** button on a locked service entry turns it back to be unlocked.

You can make some services hidden on the services list. To hide a service entry, select the **Skip** option and select a desired service entry; then the check symbol will be marked on the selected service. To make a hidden service shown, press the **OK** button on it.

To delete a service, select the **Delete** option and select a desired service with the **OK** button, and then press the **EXIT** button; you get asked for confirmation. If you select **Yes**, the selected service will be deleted. If you want to undo the deleted service, there is nothing you can do but perform a service search again.

Once you select the **Sort** option on the left column, sorting options are displayed as follows:

Default by service number

Alphabetic by service name

Satellite by satellite

FTA–CAS from free services to pay services


CAS–FTA from pay services to free services

Fav–NoFav from favourite services to unfavourite services.

Transponder by transponder

6.2 Editing the favourite list

You can make your own favourite services list. In fact, you can define multiple favourite services lists, each being a ‘group’ of chosen services.

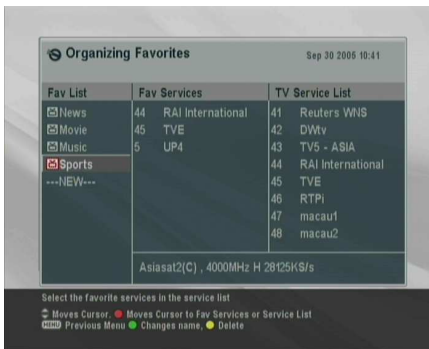

Select the Organizing Svc/Fav > Organizing Favorites menu. You should see a screen like the left figure.

There are three columns:

- Group list (left)
- Favourite list (centre)
- Services list (right)



The services list contains all available services, whereas the favourite list contains only chosen services that have been added to the highlighted group. As you move the highlight bar up or down on the group list, favourite services belonging to the highlighted group get shown in the favourite list.

You can add up to 30 groups. To add a group, select the NEW option in the group list; then the on-screen keyboard appears. See § 6.3 for how to use the on-screen keyboard.

To rename a group, put the highlight bar on the group entry you want and press the **F2** button; then the on-screen keyboard appears. See § 6.3 for how to use the on-screen keyboard.


To delete a group, put the highlight bar on the group entry you want and press the **F3** button; then a message box appears asking you for confirmation. If you select **Yes**, it will be deleted. You can add a favourite service to a group by taking the following steps:

1. Put the highlight bar on a desired group entry in the group list and press the **OK** button to select it. The highlight bar then moves to the services list.
2. To add a service to the selected group, put the highlight bar on a desired service entry and press the **OK** button. The selected service entry gets added to the favourite list. Repeat this step to add more entries.
3. Press the **F1** button and the highlight bar get moved to the favourite list. You can delete a favourite entry with the **OK** button.
4. To select another group, press the **F1** button again. By pressing the **F1** button, the highlight bar gets moved to each column.

To add radio services, press the  button; then radio service entries get listed in the services list. To recall the television services list after adding radio services, press the  button again.

With your favourite services list, you can select your favourite services more easily. Refer to § 5.2.2 for detailed description.

6.3 How to use on-screen keyboard

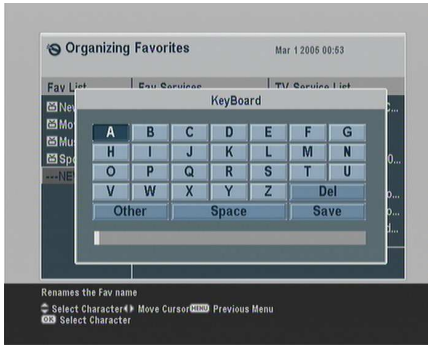

You can move the highlight key horizontally with the ◀ and ▶ buttons and vertically with the ▲ and ▼ buttons. Pressing the (OK) button on a key enters its letter in the input line. To type a space, select the Space key. To type lower case letters or numerals, select the Other key.


To delete a letter, put the cursor to the right of the desired letter on the input line and then select the Del key. You must select the Save key to complete naming; otherwise, if you press the (EXIT) button, it will not be named.

6.4 Transferring receiver data

The digital receiver retains the following data:

- Satellite and transponder data
- Services list
- Favourite lists
- Preference settings

It is possible to transfer the receiver data from the digital receiver to another same digital receiver by connecting them with a RS-232 cable. To have the receiver data transferred, perform the following steps:



1. Plug one end of a RS-232 cable (9 pin D-sub cable) into the RS-232 port on the digital receiver, and the other end into the matching port on the other digital receiver.
2. Turn on the source digital receiver.
3. Select the Installation > Transfer Firmware > Transfer Data to Other IRD menu, then you get asked for confirmation; select Yes.
4. To start the data transfer, turn on the target digital receiver.
5. A progress bar appears showing the progress of the data transfer.
6. Restart the target digital receiver when the data transfer is complete.

Chapter 7

Firmware Update

The digital receiver has a stable and convenient firmware to use. However, a new firmware may be released to improve the digital receiver. You can get the latest firmware and an update utility which runs on most versions of Windows from the Topfield website, <http://www.i-topfield.com>.

7.1 Checking the firmware information



You have to check the firmware information of your digital receiver before downloading a new firmware. Select the Information > IRD Status menu. You should see a screen like the left figure.

Remember the System ID, and download a firmware with the same system identification.


NOTE

You can only update with firmwares of which system identification is identical to that of yours. Otherwise you will fail in firmware update.

7.2 From your computer via RS-232 port


It is possible to transfer a new firmware to the digital receiver from your computer by connecting them with a RS-232 cable. You need *SDL Downloader*, a firmware transfer utility for this, which is available from the website, <http://www.i-topfield.com>.

To update the firmware with this method, perform the following steps:



1. Download a new firmware applicable to your digital receiver from the Topfield website.
2. Turn off the digital receiver.
3. Plug one end of a RS-232 cable (9 pin D-sub cable) into the RS-232 port on the digital receiver, and the other end into the matching port on your computer.
4. Run *SDL Downloader*.


The instructions on how to use *SDL Downloader* are as follows:



1. Press the Find button to select the new firmware file.
2. Press the download button, and then turn on the digital receiver to start the file transfer.
3. A countdown will be displayed on screen
4. Restart the digital receiver when the file transfer is complete.

7.3 From another digital receiver via RS-232 port

It is possible to transfer the firmware from the digital receiver to another same digital receiver by connecting them with a RS-232 cable. To update the firmware with this method, perform the following steps:



1. Turn off the target digital receiver.
2. Plug one end of a RS-232 cable (9 pin D-sub cable) into the RS-232 port on the digital receiver, and the other end into the matching port on the other digital receiver.
3. Turn on the source digital receiver if not already on.
4. Select the Installation > Transfer Firmware > Transfer Firmware to Other IRD menu, then you get asked for confirmation; select Yes.
5. Turn on the target digital receiver to start the firmware transfer.
6. A progress bar appears showing the progress of the firmware transfer.
7. Restart the target digital receiver when the firmware transfer is complete.

Index

- 16:9, [17](#)
- 16:9 Display Format, [18](#)
- 1st Audio Language, [15](#)
- 1st Subtitle Language, [15](#)
- 22 kHz, [26](#)
- 2nd Audio Language, [15](#)
- 2nd Subtitle Language, [15](#)
- 4:3, [17](#)

- A/V Output Setting, [16](#)
- Access Control, [22](#)
- Add to Fav, [35](#)
- Advanced, [31](#)
- Alphabetic, [35](#), [45](#)
- AUDIO L, [11](#)
- AUDIO L/R, [8](#)
- AUDIO R, [11](#)
- Auto, [30](#)

- Button, [4](#)

- C band, [24](#)
- CAS only, [31](#)
- CAS TP, [20](#)
- CAS–FTA, [35](#), [45](#)
- Censorship, [21](#)
- Center extract, [18](#)
- Change PIN Code, [22](#)

- Date, [41](#)
- Default, [35](#), [45](#)
- Delete, [35](#), [44](#)

- DiSEqC, [26](#)
- DiSEqC 1.0, [26](#)
- DiSEqC 1.1, [26](#)
- DiSEqC Command Mode, [27](#)
- download, [51](#)
- Duration, [41](#)
- DVB, [1](#)

- Electronic Programme Guide, [39](#)
- Every Day, [41](#)
- Every Weekday, [41](#)
- Every Weekend, [41](#)

- Factory Setting, [32](#)
- Fav–NoFav, [35](#), [45](#)
- Find, [51](#)
- Frequency, [27](#), [29–31](#)
- FTA + CAS, [32](#)
- FTA only, [31](#)
- FTA–CAS, [35](#), [45](#)
- FTA/Scrambled, [31](#)

- GMT Collection, [20](#)
- Goto, [27](#)
- Goto the position, [29](#)

- Info Box Display Time, [22](#)
- Info Box Position, [23](#)
- information box, [37](#)
- IRD Status, [49](#)

- K_u band, [25](#)

- keyboard, [47](#)

- Language Setting, [14](#)
- Letter Box, [18](#)
- LNB, [25](#)
- LNB Frequency, [25, 26](#)
- LNB IN, [8](#)
- LNB IN, [9](#)
- LNB OUT, [8](#)
- LNB OUT, [9](#)
- LNB Power, [26](#)
- LNB Setting, [25](#)
- Local Time, [21](#)
- Lock, [35, 44](#)

- Manual, [30](#)
- Menu Language, [14](#)
- Mini A, [26](#)
- Mode, [19, 21, 41](#)
- mono, [18](#)
- Motor Control, [27, 28](#)
- Motorized DiSEqC 1.2, [27](#)
- Motorized DiSEqC 1.3, [28](#)
- Move, [29, 44](#)
- Movement, [27](#)
- multifeed, [40](#)
- My Latitude, [28](#)
- My Longitude, [28](#)

- Network Search, [30](#)
- NEW, [45](#)
- No block, [21](#)
- Normal, [20](#)
- normal-screen television, [17](#)
- NTSC, [16](#)

- One Time, [41](#)
- Organizing Favorites, [45](#)
- Organizing Services, [43](#)
- OSD Transparency, [22](#)
- Other, [25](#)

- PAL, [16](#)
- Parental Control, [21](#)
- PID, [31](#)
- PID, [31](#)
- PIN, [21](#)
- Polarization, [30, 31](#)
- Provider, [35](#)

- Radio, [41](#)
- radio services list, [44](#)
- Rename, [35, 44](#)
- RF Channel, [19](#)
- RF IN, [8](#)
- RF IN, [12](#)
- RF OUT, [8](#)
- RF OUT, [12, 18](#)
- RF Output, [18](#)
- RS-232, [9](#)
- RS-232, [48, 51, 52](#)

- S/PDIF, [8](#)
- S/PIDF, [11](#)
- Satellite, [35, 45](#)
- Satellite, [20, 34, 41](#)
- Satellite Angle, [28](#)
- satellite list, [25, 35](#)
- Satellite Name, [25, 27, 28, 30, 31](#)
- SDL Downloader*, [51](#)
- Search Mode, [30, 31](#)
- Service, [41](#)
- Service Search, [29](#)
- services list, [33](#)
- Show Provider, [35](#)
- Skip, [44](#)
- SMATV, [29](#)
- SMATV, [31](#)
- Sort, [44](#)
- Sorting, [35](#)
- Sound Mode, [18](#)
- Space, [47](#)
- specifications, [7, 9](#)
- Start Search, [32](#)
- Start Time, [41](#)
- stereo, [18](#)
- Store, [28](#)
- subtitle, [38](#)
- Symbol Rate, [30, 31](#)
- System ID, [49](#)

System Setting, 22

teletext, 38

television services list, 44

time format, 21

Time Offset, 19, 20

Time Setting, 19, 22

timer list, 40

Timer Setting, 40

Total block, 22

Transfer Data to Other IRD, 48

Transfer Firmware to Other IRD, 52

Transponder, 45

Transponder, 21, 27, 29

transponder, 1

TV, 8

TV, 10, 41

TV Aspect Ratio, 17

TV Type, 16

Type, 41

USALS, 28

USALS Setting, 28

User, 27

User Select, 20

VCR, 8

VCR, 12

VCR Scart Type, 17

VIDEO, 8

VIDEO, 10, 11

Video Output, 17

Weekly, 41

wide-screen television, 17



Correct disposal of this product

This marking shown on the product or its literature indicates that it should not be disposed with other household wastes at the end of its working life. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household users should contact either the retailer where they purchased this product or their local government office for details of where and how they can dispose this product for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.

Topfield continues to improve the digital receiver which this guide explains. So some explanations and illustrations in this guide could be different from the actual digital receiver.